



Message Implementation Guideline

ChangeOrder

Model: ChangeOrder_xCBL_3_5
Version: 1.0
Issue date: 03.06.2024
Author: Würth Industry

Structure

Occurrence	Element/Attribute
	ChangeOrder
1 .. 1	xs:sequence
1 .. 1	ChangeOrderHeader
1 .. 1	xs:sequence
1 .. 1	ChangeOrderNumber
1 .. 1	xs:sequence
1 .. 1	BuyerChangeOrderNumber
1 .. 1	ChangeOrderSequence
1 .. 1	ChangeOrderIssueDate
1 .. 1	OrderReference
1 .. 1	xs:sequence
1 .. 1	RefNum
1 .. 1	SellerParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
1 .. 1	BuyerParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
0 .. 1	Purpose
1 .. 1	xs:sequence
1 .. 1	PurposeCoded
1 .. 1	ChangeType
1 .. 1	xs:sequence
1 .. 1	ChangeTypeCoded
0 .. 1	ChangeTypeCodedOther
0 .. 1	OriginalOrderHeaderWithChanges
1 .. 1	xs:sequence
1 .. 1	OrderNumber
1 .. 1	xs:sequence
1 .. 1	BuyerOrderNumber
1 .. 1	OrderIssueDate
1 .. 1	OrderCurrency
1 .. 1	xs:sequence
1 .. 1	CurrencyCoded
1 .. 1	OrderLanguage
1 .. 1	xs:sequence
1 .. 1	LanguageCoded
0 .. 1	OrderDates

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	xs:sequence
0 .. 1	RequestedDeliverByDate
1 .. 1	OrderParty
1 .. 1	xs:sequence
1 .. 1	BuyerParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
0 .. 1	PrimaryContact
1 .. 1	xs:sequence
1 .. 1	ContactName
0 .. 1	ListOfContactNumber
1 .. 1	xs:sequence
1 .. 3	ContactNumber
1 .. 1	xs:sequence
1 .. 1	ContactNumberValue
1 .. 1	ContactNumberTypeCoded
1 .. 1	SellerParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
0 .. 1	ShipToParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
0 .. 1	NameAddress
1 .. 1	xs:sequence
1 .. 1	Name1
0 .. 1	Name2
0 .. 1	Name3
0 .. 1	Street
0 .. 1	PostalCode
0 .. 1	City
0 .. 1	Country
1 .. 1	xs:sequence
1 .. 1	CountryCoded
0 .. 1	PrimaryContact

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	xs:sequence
1 .. 1	ContactName
0 .. 1	ListOfContactNumber
1 .. 1	xs:sequence
1 .. 3	ContactNumber
1 .. 1	xs:sequence
1 .. 1	ContactNumberValue
1 .. 1	ContactNumberTypeCoded
0 .. 1	BillToParty
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartyID
1 .. 1	xs:sequence
0 .. 1	Agency
1 .. 1	xs:sequence
1 .. 1	AgencyCoded
1 .. 1	Ident
0 .. 1	NameAddress
1 .. 1	xs:sequence
1 .. 1	Name1
0 .. 1	Name2
0 .. 1	Name3
0 .. 1	Street
0 .. 1	Department
0 .. 1	PostalCode
0 .. 1	City
0 .. 1	Country
1 .. 1	xs:sequence
1 .. 1	CountryCoded
0 .. 1	PrimaryContact
1 .. 1	xs:sequence
1 .. 1	ContactName
0 .. 1	ListOfContactNumber
1 .. 1	xs:sequence
1 .. 3	ContactNumber
1 .. 1	xs:sequence
1 .. 1	ContactNumberValue
1 .. 1	ContactNumberTypeCoded
0 .. 1	OrderTermsOfDelivery
1 .. 1	xs:sequence
1 .. 1	TermsOfDeliveryFunctionCoded
0 .. 1	TransportTermsCoded
0 .. 1	TransportTermsCodedOther
1 .. 1	ShipmentMethodOfPaymentCoded
0 .. 1	ListOfStructuredNote
1 .. 1	xs:sequence
1 .. 1	StructuredNote
1 .. 1	xs:sequence
0 .. 1	GeneralNote
0 .. 1	NoteID
1 .. 1	ChangeOrderDetail
1 .. 1	xs:sequence

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
0 .. 1	ListOfChangeOrderItemDetail
1 .. 1	xs:sequence
1 .. 999	ChangeOrderItemDetail
1 .. 1	xs:sequence
1 .. 1	ItemDetailChangeCoded
0 .. 1	OriginalItemDetailWithChanges
1 .. 1	xs:sequence
1 .. 1	BaseItemDetail
1 .. 1	xs:sequence
1 .. 1	LinItemNum
1 .. 1	xs:sequence
1 .. 1	BuyerLinItemNum
0 .. 1	ItemIdentifiers
1 .. 1	xs:sequence
0 .. 1	PartNumbers
1 .. 1	xs:sequence
0 .. 1	SellerPartNumber
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartID
0 .. 1	BuyerPartNumber
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	PartID
0 .. 1	StandardPartNumber
1 .. 1	xs:sequence
1 .. 1	ProductIdentifierQualifierCoded
0 .. 1	ProductIdentifierQualifierCodedOther
1 .. 1	ProductIdentifier
0 .. 1	ProductIdentifierExt
0 .. 1	ItemDescription
0 .. 1	TotalQuantity
1 .. 1	xs:sequence
0 .. 1	xs:sequence
0 .. 1	xs:choice
1 .. 1	QuantityValue
0 .. 1	UnitOfMeasurement
1 .. 1	xs:sequence
1 .. 1	UOMCoded
0 .. 1	ListOfQuantityCoded
1 .. 1	xs:sequence
1 .. 1	QuantityCoded
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	xs:choice
1 .. 1	QuantityValue
1 .. 1	UnitOfMeasurement
1 .. 1	xs:sequence
1 .. 1	UOMCoded
1 .. 1	xs:sequence
1 .. 1	QuantityQualifierCoded
0 .. 1	PricingDetail

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	xs:sequence
1 .. 1	ListOfPrice
1 .. 1	xs:sequence
1 .. 1	Price
1 .. 1	xs:sequence
1 .. 1	UnitPrice
1 .. 1	xs:sequence
1 .. 1	UnitPriceValue
0 .. 1	Currency
1 .. 1	xs:sequence
1 .. 1	CurrencyCoded
1 .. 1	xs:choice
0 .. 1	PriceBasisQuantity
1 .. 1	xs:sequence
0 .. 1	xs:sequence
0 .. 1	xs:choice
1 .. 1	QuantityValue
0 .. 1	UnitOfMeasurement
1 .. 1	xs:sequence
1 .. 1	UOMCoded
0 .. 1	LinItemSubTotal
1 .. 1	xs:sequence
1 .. 1	MonetaryAmount
0 .. 1	Currency
1 .. 1	xs:sequence
1 .. 1	CurrencyCoded
0 .. 1	DeliveryDetail
1 .. 1	xs:sequence
0 .. 1	ListOfScheduleLine
1 .. 1	xs:sequence
1 .. 1	ScheduleLine
1 .. 1	xs:sequence
1 .. 1	Quantity
1 .. 1	xs:sequence
0 .. 1	xs:sequence
0 .. 1	xs:choice
1 .. 1	QuantityValue
0 .. 1	UnitOfMeasurement
1 .. 1	xs:sequence
1 .. 1	UOMCoded
1 .. 2	xs:choice
0 .. 1	ListOfOtherDeliveryDate
1 .. 1	xs:sequence
1 .. 1	DateCoded
1 .. 1	xs:sequence
1 .. 1	Date
1 .. 1	DateQualifier
1 .. 1	xs:sequence
1 .. 1	DateQualifierCoded
0 .. 1	ListOfStructuredNote
1 .. 1	xs:sequence
1 .. 10	StructuredNote

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	xs:sequence
0 .. 1	GeneralNote
0 .. 1	NoteID

Guideline

Element/Attribute	Annotation	
ChangeOrder	Type	ChangeOrder
xs:sequence	Occurrence	1 .. 1
ChangeOrderHeader	Occurrence	1 .. 1
	Description	Contains the header information of the ChangeOrder.
xs:sequence	Occurrence	1 .. 1
ChangeOrderNumber	Occurrence	1 .. 1
xs:sequence	Occurrence	1 .. 1
BuyerChangeOrderNumber	Occurrence	1 .. 1
	Type	xs:string
	Description	Contains the order number.
ChangeOrderSequence	Occurrence	1 .. 1
	Type	xs:string
	Description	Contains the default value: 1
ChangeOrderIssueDate	Occurrence	1 .. 1
	Type	xs:dateTime
	Description	CCYY-MM-DDThh:ss:mm+02:00
OrderReference	Occurrence	1 .. 1
	Type	OrderReference
xs:sequence	Occurrence	1 .. 1
RefNum	Occurrence	1 .. 1
	Type	xs:string
	Description	Contains the order number.
SellerParty	Occurrence	1 .. 1
	Type	SellerParty
	Description	Contains the information of the seller party.
xs:sequence	Occurrence	1 .. 1
xs:sequence	Occurrence	1 .. 1
PartyID	Occurrence	1 .. 1
	Type	PartyID
xs:sequence	Occurrence	1 .. 1
Agency	Occurrence	0 .. 1
	Type	Agency
xs:sequence	Occurrence	1 .. 1
AgencyCoded	Occurrence	1 .. 1
	Type	restriction (xs:string)
	Description	Used code: AssignedByBuyerOrBuyersAgent
Ident	Occurrence	1 .. 1
	Type	xs:string
	Description	Holds the identification number assigned by the buyer.
BuyerParty	Occurrence	1 .. 1
	Type	SellerParty
	Description	Contains the information of the party purchasing the goods.
xs:sequence	Occurrence	1 .. 1
xs:sequence	Occurrence	1 .. 1
PartyID	Occurrence	1 .. 1
	Type	PartyID
xs:sequence	Occurrence	1 .. 1
Agency	Occurrence	0 .. 1
	Type	Agency
xs:sequence	Occurrence	1 .. 1
AgencyCoded	Occurrence	1 .. 1
	Type	restriction (xs:string)
	Description	Used code: AssignedByBuyerOrBuyersAgent
Ident	Occurrence	1 .. 1
	Type	xs:string
	Description	Holds the identification number assigned by the Buyer.

Bold = Element, *Italic* = Attribute, Grey = Group

Element/Attribute		Annotation	
Purpose		Occurrence	0 .. 1
		Type	Purpose
<i>xs:sequence</i>		Occurrence	1 .. 1
PurposeCoded		Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Contains the default value: 1
ChangeType		Occurrence	1 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
ChangeTypeCoded		Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: Other
ChangeTypeCodedOther		Occurrence	0 .. 1
		Type	xs:string
		Description	Used code: Change
OriginalOrderHeaderWithChanges		Occurrence	0 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
OrderNumber		Occurrence	1 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
BuyerOrderNumber		Occurrence	1 .. 1
		Type	xs:string
		Description	Is the unique number assigned by the buyer to the Order.
OrderIssueDate		Occurrence	1 .. 1
		Type	xs:dateTime
		Description	CCYY-MM-DDT02:00:00+02:00
OrderCurrency		Occurrence	1 .. 1
		Type	Currency
		Description	Currency
<i>xs:sequence</i>		Occurrence	1 .. 1
CurrencyCoded		Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 4217 3-Alpha Code
OrderLanguage		Occurrence	1 .. 1
		Type	CorrespondenceLanguage
		Description	Identifies the language of the OrderChange.
<i>xs:sequence</i>		Occurrence	1 .. 1
LanguageCoded		Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 3166 2-Alpha Code
OrderDates		Occurrence	0 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
RequestedDeliverByDate		Occurrence	0 .. 1
		Type	xs:dateTime
		Description	CCYY-MM-DDT02:00:00+02:00
OrderParty		Occurrence	1 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
BuyerParty		Occurrence	1 .. 1
		Type	SellerParty
<i>xs:sequence</i>		Occurrence	1 .. 1
<i>xs:sequence</i>		Occurrence	1 .. 1
PartyID		Occurrence	1 .. 1
		Type	PartyID
<i>xs:sequence</i>		Occurrence	1 .. 1
Agency		Occurrence	0 .. 1
		Type	Agency
<i>xs:sequence</i>		Occurrence	1 .. 1
AgencyCoded		Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: AssignedByBuyerOrBuyersAgent

Bold = Element, *Italic* = Attribute, Grey = Group

Element/Attribute		Annotation	
Ident	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Holds the identification number assigned by the buyer.	
PrimaryContact	Occurrence	0 .. 1	
	Type	PrimaryContact	
xs:sequence	Occurrence	1 .. 1	
ContactName	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Identifies the department or employee name.	
ListOfContactNumber	Occurrence	0 .. 1	
	xs:sequence	Occurrence	1 .. 1
	ContactNumber	Occurrence	1 .. 3
xs:sequence	Occurrence	1 .. 1	
ContactNumberValue	Occurrence	1 .. 1	
	Type	xs:string	
ContactNumberTypeCoded	Occurrence	1 .. 1	
	Type	restriction (xs:string)	
	Description	Used codes: EmailAddress, FaxNumber and TelephoneNumber	
SellerParty	Occurrence	1 .. 1	
	Type	SellerParty	
xs:sequence	Occurrence	1 .. 1	
xs:sequence	Occurrence	1 .. 1	
PartyID	Occurrence	1 .. 1	
	Type	PartyID	
xs:sequence	Occurrence	1 .. 1	
Agency	Occurrence	0 .. 1	
	Type	Agency	
xs:sequence	Occurrence	1 .. 1	
AgencyCoded	Occurrence	1 .. 1	
	Type	restriction (xs:string)	
	Description	Used code: AssignedByBuyerOrBuyersAgent	
Ident	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Holds the identification number assigned by the buyer.	
ShipToParty	Occurrence	0 .. 1	
	Type	SellerParty	
xs:sequence	Occurrence	1 .. 1	
xs:sequence	Occurrence	1 .. 1	
PartyID	Occurrence	1 .. 1	
	Type	PartyID	
xs:sequence	Occurrence	1 .. 1	
Agency	Occurrence	0 .. 1	
	Type	Agency	
xs:sequence	Occurrence	1 .. 1	
AgencyCoded	Occurrence	1 .. 1	
	Type	restriction (xs:string)	
	Description	Used code: AssignedByBuyerOrBuyersAgent	
Ident	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Holds the identification number assigned by the buyer.	
NameAddress	Occurrence	0 .. 1	
	Type	NameAddress	
xs:sequence	Occurrence	1 .. 1	
Name1	Occurrence	1 .. 1	
	Type	xs:string	
Name2	Occurrence	0 .. 1	
	Type	xs:string	

Bold = Element, *Italic* = Attribute, Grey = Group

Element/Attribute		Annotation	
	Name3	Occurrence	0 .. 1
		Type	xs:string
	Street	Occurrence	0 .. 1
		Type	xs:string
	PostalCode	Occurrence	0 .. 1
		Type	xs:string
	City	Occurrence	0 .. 1
		Type	xs:string
	Country	Occurrence	0 .. 1
		Type	Country
	xs:sequence	Occurrence	1 .. 1
	CountryCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 3166 2-Alpha Code
	PrimaryContact	Occurrence	0 .. 1
		Type	PrimaryContact
	xs:sequence	Occurrence	1 .. 1
	ContactName	Occurrence	1 .. 1
		Type	xs:string
	ListOfContactNumber	Occurrence	0 .. 1
	xs:sequence	Occurrence	1 .. 1
	ContactNumber	Occurrence	1 .. 3
	xs:sequence	Occurrence	1 .. 1
	ContactNumberValue	Occurrence	1 .. 1
		Type	xs:string
	ContactNumberTypeCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used codes: EmailAddress, FaxNumber and TelephoneNumber
	BillToParty	Occurrence	0 .. 1
		Type	SellerParty
	xs:sequence	Occurrence	1 .. 1
	xs:sequence	Occurrence	1 .. 1
	PartyID	Occurrence	1 .. 1
		Type	PartyID
	xs:sequence	Occurrence	1 .. 1
	Agency	Occurrence	0 .. 1
		Type	Agency
	xs:sequence	Occurrence	1 .. 1
	AgencyCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: AssignedByBuyerOrBuyersAgent
	Ident	Occurrence	1 .. 1
		Type	xs:string
		Description	Holds the identification number assigned by the buyer.
	NameAddress	Occurrence	0 .. 1
		Type	NameAddress
	xs:sequence	Occurrence	1 .. 1
	Name1	Occurrence	1 .. 1
		Type	xs:string
	Name2	Occurrence	0 .. 1
		Type	xs:string
	Name3	Occurrence	0 .. 1
		Type	xs:string
	Street	Occurrence	0 .. 1
		Type	xs:string
	Department	Occurrence	0 .. 1
		Type	xs:string

Bold = Element, *Italic* = Attribute, Grey = Group

Element/Attribute		Annotation	
	PostalCode	Occurrence	0 .. 1
		Type	xs:string
	City	Occurrence	0 .. 1
		Type	xs:string
	Country	Occurrence	0 .. 1
		Type	Country
	<i>xs:sequence</i>	Occurrence	1 .. 1
	CountryCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 3166 2-Alpha Code
	PrimaryContact	Occurrence	0 .. 1
		Type	PrimaryContact
	<i>xs:sequence</i>	Occurrence	1 .. 1
	ContactName	Occurrence	1 .. 1
		Type	xs:string
	ListOfContactNumber	Occurrence	0 .. 1
	<i>xs:sequence</i>	Occurrence	1 .. 1
	ContactNumber	Occurrence	1 .. 3
	<i>xs:sequence</i>	Occurrence	1 .. 1
	ContactNumberValue	Occurrence	1 .. 1
		Type	xs:string
	ContactNumberTypeCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used codes: EmailAddress, FaxNumber and TelephoneNumber
	OrderTermsOfDelivery	Occurrence	0 .. 1
		Type	OrderTermsOfDelivery
	<i>xs:sequence</i>	Occurrence	1 .. 1
	TermsOfDeliveryFunctionCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: DeliveryCondition
	TransportTermsCoded	Occurrence	0 .. 1
		Type	restriction (xs:string)
		Description	Used code: Other
	TransportTermsCodedOther	Occurrence	0 .. 1
		Type	xs:string
		Description	Is used to provide a non-standard TransportTermsCode, e.g. "DAP; Köln"
	ShipmentMethodOfPaymentCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	not filled
	ListOfStructuredNote	Occurrence	0 .. 1
		Type	ListOfStructuredNote
		Description	Contains the header text for the delivery note.
	<i>xs:sequence</i>	Occurrence	1 .. 1
	StructuredNote	Occurrence	1 .. 1
	<i>xs:sequence</i>	Occurrence	1 .. 1
	GeneralNote	Occurrence	0 .. 1
		Type	xs:string
	NoteID	Occurrence	0 .. 1
		Type	xs:string
		Description	Used code: Lieferscheinkopftext
	ChangeOrderDetail	Occurrence	1 .. 1
		Description	Contains the line items of the ChangeOrder which were changed.
	<i>xs:sequence</i>	Occurrence	1 .. 1
	ListOfChangeOrderItemDetail	Occurrence	0 .. 1
	<i>xs:sequence</i>	Occurrence	1 .. 1
	ChangeOrderItemDetail	Occurrence	1 .. 999

Bold = Element, Italic = Attribute, Grey = Group

Element/Attribute	Annotation
xs:sequence	Occurrence 1 .. 1
ItemDetailChangeCoded	Occurrence 1 .. 1 Type restriction (xs:string) Description Used codes: AddAdditionalItems, ChangesToLineItems and Cancelled
OriginalItemDetailWithChanges	Occurrence 0 .. 1
xs:sequence	Occurrence 1 .. 1
BaseItemDetail	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
LineItemNum	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
BuyerLineItemNum	Occurrence 1 .. 1 Type xs:decimal Description Buyer's assigned line item number.
ItemIdentifiers	Occurrence 0 .. 1
xs:sequence	Occurrence 1 .. 1
PartNumbers	Occurrence 0 .. 1
xs:sequence	Occurrence 1 .. 1
SellerPartNumber	Occurrence 0 .. 1 Type SellerPartNumber Description Is the identification of a product or service as assigned by the seller of the product or service.
xs:sequence	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
PartID	Occurrence 1 .. 1 Type xs:string Description Is the basic identification for a product or service.
BuyerPartNumber	Occurrence 0 .. 1 Type SellerPartNumber Description Is the identification of a product or service as assigned by the buyer of the product or service.
xs:sequence	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
PartID	Occurrence 1 .. 1 Type xs:string Description Is the basic identification for a product or service.
StandardPartNumber	Occurrence 0 .. 1 Type StandardPartNumber Description Is the basic identification for a product or service.
xs:sequence	Occurrence 1 .. 1
ProductIdentifierQualifierCoded	Occurrence 1 .. 1 Type restriction (xs:string) Description Used code: Other
ProductIdentifierQualifierCodedOther	Occurrence 0 .. 1 Type xs:string Description Used codes: EAN13, CustomerPartNumber and Packing
ProductIdentifier	Occurrence 1 .. 1 Type xs:string Description Contains a basic identification for a product or service.
ProductIdentifierExt	Occurrence 0 .. 1 Type xs:string Description Contains the short text of the product or service.
ItemDescription	Occurrence 0 .. 1 Type xs:string Description Contains the buyer's short text of the product or service.
TotalQuantity	Occurrence 0 .. 1 Type Quantity
xs:sequence	Occurrence 1 .. 1
xs:sequence	Occurrence 0 .. 1

Bold = Element, *Italic* = Attribute, Grey = Group

Element/Attribute		Annotation	
	xs:choice	Occurrence	0 .. 1
	QuantityValue	Occurrence	1 .. 1
		Type	QuantityValue
		Description	Is used to specify a specific value of a quantity.
	UnitOfMeasurement	Occurrence	0 .. 1
		Type	UnitOfMeasurement
		Description	Specifies the unit of measurement that the value is specified in.
	xs:sequence	Occurrence	1 .. 1
	UOMCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used codes: PCE and C62 PCE = piece C62 = piece
	ListOfQuantityCoded	Occurrence	0 .. 1
		Type	ListOfQuantityCoded
		Description	Is used to define other quantities relative to the shipment.
	xs:sequence	Occurrence	1 .. 1
	QuantityCoded	Occurrence	1 .. 1
	xs:sequence	Occurrence	1 .. 1
	xs:sequence	Occurrence	1 .. 1
	xs:choice	Occurrence	1 .. 1
	QuantityValue	Occurrence	1 .. 1
		Type	QuantityValue
	UnitOfMeasurement	Occurrence	1 .. 1
		Type	UnitOfMeasurement
	xs:sequence	Occurrence	1 .. 1
	UOMCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Is used to define the unit of measure, e.g. GRM. GRM = gram
	xs:sequence	Occurrence	1 .. 1
	QuantityQualifierCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: Weight
	PricingDetail	Occurrence	0 .. 1
	xs:sequence	Occurrence	1 .. 1
	ListOfPrice	Occurrence	1 .. 1
		Type	OrderHeaderPrice
	xs:sequence	Occurrence	1 .. 1
	Price	Occurrence	1 .. 1
	xs:sequence	Occurrence	1 .. 1
	UnitPrice	Occurrence	1 .. 1
		Type	UnitPrice
	xs:sequence	Occurrence	1 .. 1
	UnitPriceValue	Occurrence	1 .. 1
		Type	xs:decimal
		Description	Contains the value of the unit price.
	Currency	Occurrence	0 .. 1
		Type	Currency
		Description	Specifies the currency.
	xs:sequence	Occurrence	1 .. 1
	CurrencyCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 4217 3-Alpha Code
	xs:choice	Occurrence	1 .. 1
	PriceBasisQuantity	Occurrence	0 .. 1
		Type	Quantity
	xs:sequence	Occurrence	1 .. 1

Bold = Element, Italic = Attribute, Grey = Group

Element/Attribute		Annotation	
	xs:sequence	Occurrence	0 .. 1
	xs:choice	Occurrence	0 .. 1
	QuantityValue	Occurrence	1 .. 1
		Type	QuantityValue
		Description	Is used to specify a specific value of a quantity.
	UnitOfMeasurement	Occurrence	0 .. 1
		Type	UnitOfMeasurement
		Description	Specifies the unit of measurement that the value or the range is specified in.
	xs:sequence	Occurrence	1 .. 1
	UOMCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used codes: PCE and C62 PCE = piece C62 = piece
	LineItemSubTotal	Occurrence	0 .. 1
		Type	MonetaryValue
	xs:sequence	Occurrence	1 .. 1
	MonetaryAmount	Occurrence	1 .. 1
		Type	xs:decimal
		Description	Contains the value of the monetary amount.
	Currency	Occurrence	0 .. 1
		Type	Currency
		Description	Specifies the currency that the MonetaryValue is expressed in.
	xs:sequence	Occurrence	1 .. 1
	CurrencyCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	ISO 4217 3-Alpha Code
	DeliveryDetail	Occurrence	0 .. 1
	xs:sequence	Occurrence	1 .. 1
	ListOfScheduleLine	Occurrence	0 .. 1
	xs:sequence	Occurrence	1 .. 1
	ScheduleLine	Occurrence	1 .. 1
	xs:sequence	Occurrence	1 .. 1
	Quantity	Occurrence	1 .. 1
		Type	Quantity
	xs:sequence	Occurrence	1 .. 1
	xs:sequence	Occurrence	0 .. 1
	xs:choice	Occurrence	0 .. 1
	QuantityValue	Occurrence	1 .. 1
		Type	QuantityValue
		Description	not filled
	UnitOfMeasurement	Occurrence	0 .. 1
		Type	UnitOfMeasurement
		Description	Specifies the unit of measurement that the value is specified in.
	xs:sequence	Occurrence	1 .. 1
	UOMCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	not filled
	xs:choice	Occurrence	1 .. 2
	ListOfOtherDeliveryDate	Occurrence	0 .. 1
		Type	ListOfDateCoded
	xs:sequence	Occurrence	1 .. 1
	DateCoded	Occurrence	1 .. 1
		Description	CCYY-MM-DDT02:00:00+02:00
	xs:sequence	Occurrence	1 .. 1

Bold = Element, Italic = Attribute, Grey = Group


Element/Attribute		Annotation	
	Date	Occurrence	1 .. 1
		Type	xs:dateTime
		Description	CCYY-MM-DDT02:00:00+02:00
	DateQualifier	Occurrence	1 .. 1
	<i>xs:sequence</i>	Occurrence	1 .. 1
	DateQualifierCoded	Occurrence	1 .. 1
		Type	restriction (xs:string)
		Description	Used code: DeliveryDateTimeEstimated
	ListOfStructuredNote	Occurrence	0 .. 1
		Type	ListOfStructuredNote
		Description	Contains free text for the delivery line item ('Lieferscheinpositionstext') and order line item ('Bestellpositionstext') e.g. material short text and supplier's material number.
	<i>xs:sequence</i>	Occurrence	1 .. 1
	StructuredNote	Occurrence	1 .. 10
	<i>xs:sequence</i>	Occurrence	1 .. 1
	GeneralNote	Occurrence	0 .. 1
		Type	xs:string
	NoteID	Occurrence	0 .. 1
		Type	xs:string
		Description	Used codes: Bestellpositionstext and Lieferscheinpositionstext

Bold = Element, Italic = Attribute, Grey = Group

Components

ChangeOrder

Element



Type


ChangeOrder

Elements

ChangeOrderHeader	Usage	M
	Description	Contains the header information of the ChangeOrder.
ChangeOrderDetail	Usage	M
	Description	Contains the line items of the ChangeOrder which were changed.

Agency

ComplexType




Elements

AgencyCoded	Usage	M
	Type	restriction (xs:string)
	Description	Used code: AssignedByBuyerOrBuyersAgent

ChangeOrder

ComplexType




Elements

ChangeOrderHeader	Usage	M
	Description	Contains the header information of the ChangeOrder.
ChangeOrderDetail	Usage	M
	Description	Contains the line items of the ChangeOrder which were changed.

CorrespondenceLanguage

ComplexType





Elements


LanguageCoded	Usage	M
	Type	restriction (xs:string)
	Description	ISO 3166 2-Alpha Code


Country


ComplexType


		
Elements		
CountryCoded	Usage	M
	Type	restriction (xs:string)
	Description	ISO 3166 2-Alpha Code

Currency		ComplexType
		
Elements		
CurrencyCoded	Usage	M
	Type	restriction (xs:string)
	Description	ISO 4217 3-Alpha Code

ListOfDateCoded		ComplexType
		
Elements		
DateCoded	Usage	M
	Description	CCYY-MM-DDT02:00:00+02:00

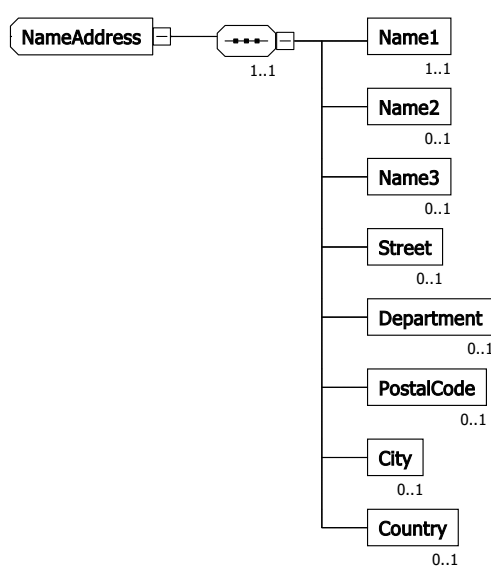
ListOfQuantityCoded		ComplexType
		
Elements		
QuantityCoded	Usage	M

ListOfStructuredNote		ComplexType
		
Elements		
StructuredNote	Usage	M

MonetaryValue		ComplexType
		

Elements		
MonetaryAmount	Usage	M
	Type	xs:decimal
	Description	Contains the value of the monetary amount.
Currency	Usage	O
	Type	Currency
	Description	Specifies the currency that the MonetaryValue is expressed in.


NameAddressComplexType



```
graph LR
    NameAddress[NameAddress 1..1] --- Name1[Name1 1..1]
    NameAddress --- Name2[Name2 0..1]
    NameAddress --- Name3[Name3 0..1]
    NameAddress --- Street[Street 0..1]
    NameAddress --- Department[Department 0..1]
    NameAddress --- PostalCode[PostalCode 0..1]
    NameAddress --- City[City 0..1]
    NameAddress --- Country[Country 0..1]
```


Elements		
Name1	Usage	M
	Type	xs:string
Name2	Usage	O
	Type	xs:string
Name3	Usage	O
	Type	xs:string
Street	Usage	O
	Type	xs:string
Department	Usage	O
	Type	xs:string
PostalCode	Usage	O
	Type	xs:string
City	Usage	O
	Type	xs:string
Country	Usage	O
	Type	Country

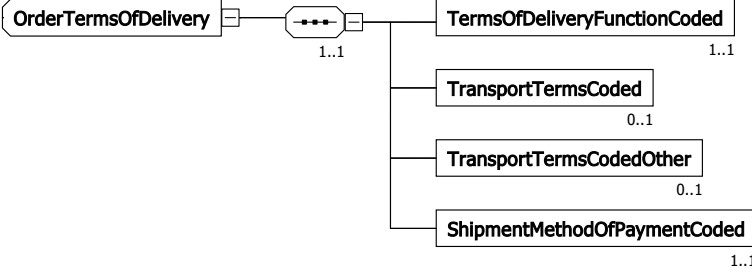
OrderHeaderPriceComplexType




```
graph LR
    OrderHeaderPrice[OrderHeaderPrice 1..1] --- Price[Price 1..*]
```

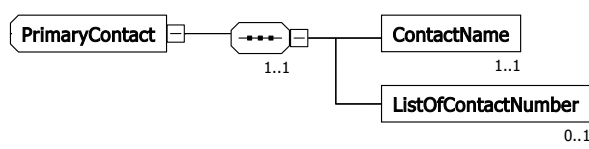
Elements		
Price	Usage	M


OrderReference			ComplexType
			
Elements			
RefNum	Usage	M	
	Type	xs:string	
	Description	Contains the order number.	


OrderTermsOfDelivery			ComplexType
			
Elements			
TermsOfDeliveryFunctionCoded	Usage	M	
	Type	restriction (xs:string)	
	Description	Used code: DeliveryCondition	
TransportTermsCoded	Usage	O	
	Type	restriction (xs:string)	
	Description	Used code: Other	
TransportTermsCodedOther	Usage	O	
	Type	xs:string	
	Description	Is used to provide a non-standard TransportTermsCode, e.g. "DAP; Köln"	
ShipmentMethodOfPaymentCoded	Usage	M	
	Type	restriction (xs:string)	
	Description	not filled	

PartyID			ComplexType
			
Elements			
Agency	Usage	O	
	Type	Agency	
Ident	Usage	M	
	Type	xs:string	
	Description	Holds the identification number assigned by the buyer.	

PrimaryContact			ComplexType
----------------	--	--	-------------


		
Elements		
ContactName	Usage	M
	Type	xs:string
ListOfContactNumber	Usage	O

Purpose		ComplexType
		
Elements		
PurposeCoded	Usage	M
	Type	restriction (xs:string)
	Description	Contains the default value: 1

Quantity		ComplexType
		
Elements		
QuantityValue	Usage	M
	Type	QuantityValue
	Description	Is used to specify a specific value of a quantity.
UnitOfMeasurement	Usage	O
	Type	UnitOfMeasurement
	Description	Specifies the unit of measurement that the value is specified in.

QuantityValue		ComplexType
		
Type	QuantityValue-1	

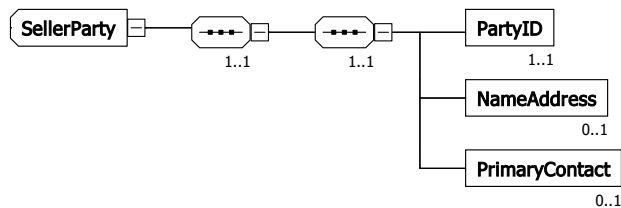
QuantityValue-1		SimpleType
Type	xs:decimal	

SellerPartNumber		ComplexType
		
Elements		
PartID	Usage	M

Elements		
	Type	xs:string
	Description	Is the basic identification for a product or service.

SellerParty

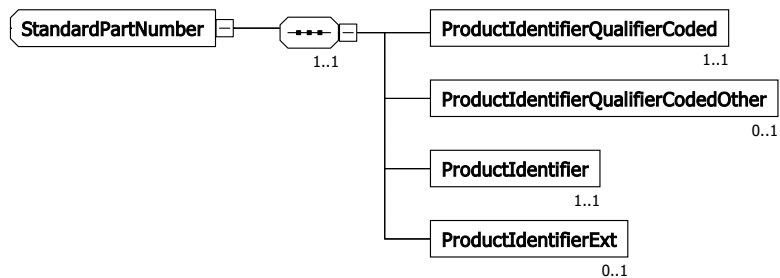
ComplexType



Elements		
PartyID	Usage	M
	Type	PartyID
NameAddress	Usage	O
	Type	NameAddress
PrimaryContact	Usage	O
	Type	PrimaryContact

StandardPartNumber


ComplexType



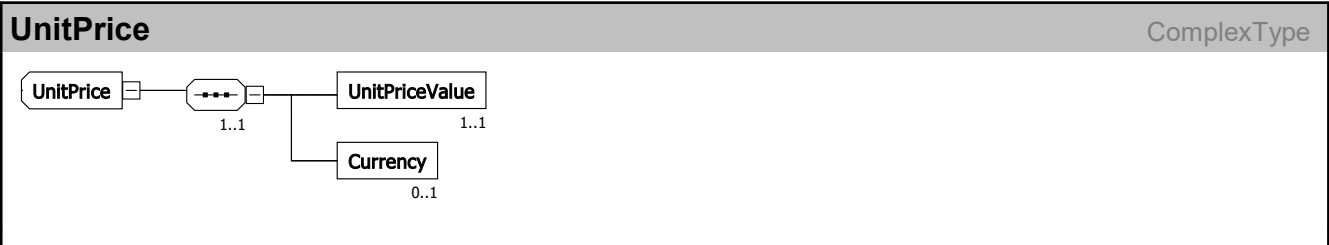
Elements		
ProductIdentifierQualifierCoded	Usage	M
	Type	restriction (xs:string)
	Description	Used code: Other
ProductIdentifierQualifierCodedOther	Usage	O
	Type	xs:string
	Description	Used codes: EAN13, CustomerPartNumber und Packing
ProductIdentifier	Usage	M
	Type	xs:string
	Description	Contains a basic identification for a product or service.
ProductIdentifierExt	Usage	O
	Type	xs:string
	Description	Contains the short text of the product or service.

UnitOfMeasurement

ComplexType



Elements		
UOMCoded	Usage Type Description	M restriction (xs:string) Used codes: PCE and C62 PCE = piece C62 = piece



Elements		
UnitPriceValue	Usage Type Description	M xs:decimal Contains the value of the unit price.
Currency	Usage Type Description	O Currency Specifies the currency that the MonetaryValue is expressed in.

xs:dateTime	SimpleType
--------------------	------------

xs:decimal	SimpleType
-------------------	------------

xs:string	SimpleType
------------------	------------